

- Electrostatic powder coated aluminum body
- Tempered glass
- Stainless connectors
- One-way or two-way light output with different beam angle possibility

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
SSA75-SINGLE	WW-NW-CW	220-240V AC	8	820	1,0
SSA75-DOUBLE	WW-NW-CW	220-240V AC	11	1.320	1,4

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options



N: Narrow Angle
M: Medium Angle

Lower and upper direction light angles can be selected separately.

G Housing Color Options




RAL9005 RAL9007 RAL9016




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

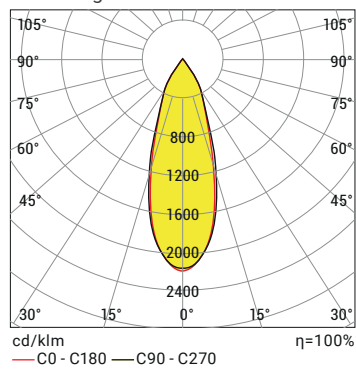

H (mt)	Ø (m)	E _{max} (lx)
0.5	0.32	5743
1.0	0.64	1436
1.5	1.96	638
2.0	1.28	359
2.5	1.61	230
3.0	1.92	160

SSA75-SINGLE 7W 36D NW40 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A				•	•	
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						